


## EZ-FLO 2000 Series

- Robust design - 1 year limited warranty
- Cannot be installed where it is under pressure when not in use - Maximum operating pressure 80 PSI
- Available in 3, 5 and 11 liter sizes

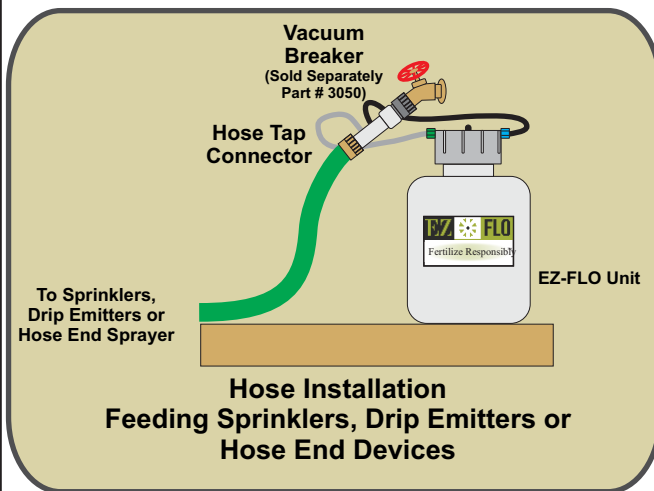


## HB Model - Hose/Drip Connection

- Connects directly to a hose tap to feed through a drip system or hose end sprayer or sprinkler
- All connection components are included
- HI-FLO disks included for low flow drip systems

## IC Model - Irrigation Connection

- Can be installed on one zone of an underground irrigation system, after the zone valve
- Ball valve installation coupling sold separately

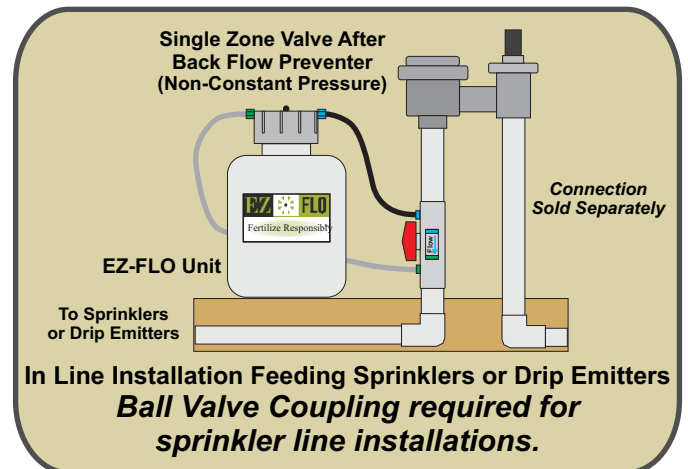

Model Number	Liters to Empty				Capacity	
	Setting	Slow	1	2	Fast	Liquid
2005	2800	1400	700	280	2.8 liters	2.3 kg
2013	5000	2500	1250	500	5.0 liters	3.6 kg
2030	11400	5700	7980	1140	11.4 liters	6.8 kg

All tank capacities are approximate.