




Fertilize Responsibly™

EZ Retro Coupling Connector

Retro (fit) coupling connectors are available in sizes from 3/4" and 1" with socket x socket connections. They are PVC schedule 40 with 1/4" nylon barbed tubing connectors. They are used to retrofit the EZ-FLO system into an existing irrigation flow line where tight conditions prevent putting in an EZ-FLO Coupling Connector. They connect with the 1/4" flexible tubing provided with the EZ-FLO system. (The nylon barbed tubing connectors are installed after the connector has been glued into the irrigation flow line.)

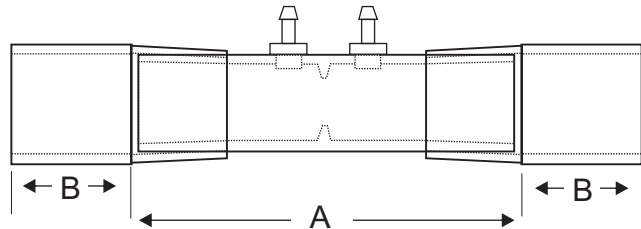


Part Number	Size	A	B
R-075	3/4" Soc	4 1/4"	1"
R-100	1" Soc	4 3/4"	1"

EZ Threaded Coupling Connector

Threaded coupling connectors are available in sizes from 3/4" and 1" with FIPT (female iron pipe thread) connections. They are PVC schedule 40 with 1/4" nylon barbed tubing connectors. They are used to connect the EZ-FLO system to the irrigation flow line with the 1/4" flexible tubing provided with the EZ-FLO system. They can be used to adapt to polyethylene or metal piping systems.

*Larger sizes available upon request.

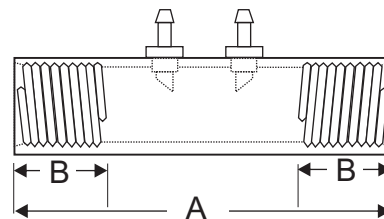

Part Number	Size	A	B
CT-075	3/4" FIPT	4 1/4"	1"
CT-100	1" FIPT	4 3/4"	1 1/4"